


Transparent Barrier

PSA

Data Sheet (January 2018)

Product description

Nuroll 12 PSA is a bi-axially oriented polyester (BOPET) film with one side coated with a PVdC copolymer water latex designed for printing, with inks for PVdC, and lamination. The coating is heat sealable and has an excellent moisture, oxygen and aroma barrier.

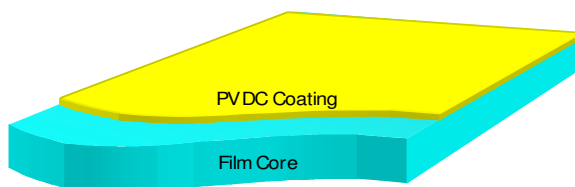

PSA film offers a good resistance to heat and humidity also during pasteurization (Nuroll test carried out at 95 °C/30 min).

Main Applications

Flexible transparent barrier packages for: meat, biscuits, coffee, snacks, dairy products, olives, car freshness, wet towels, etc.

Recommendations

12 PSA film must be preserved from the light exposition. We suggest to keep reels protected by UV barrier PE as supplied by Nuroll

Transparent Barrier

PSA

Technical details

Nuroll PSA is usually supplied with following characteristics:

- **Core diameter:** 6 inches (152.76 mm)
- **Film width:** min 400 mm, max 1960mm
- **Film length:** 12000 m, 24000m
- **Packing presentation:** suspended reel; UV barrier PE; wooden endboards, lid and pallet; stretchable PE film

Different characteristics than the above on request

Storage conditions

Nuroll PSA need to be stocked in a close warehouse and preserved from the light and from the humidity.

Reels must be not stacked

Nuroll will not accept any responsibility for material older than 1 year from the delivering

Compliance with regulations

Polyester Film produced by Nuroll SpA, complies with EEC, Italian and FDA requirements on packaging for direct contact with foodstuffs

Transparent Barrier

PSA

Properties		Unit	Test Method	Typical values
Thickness		Microns	ASTM E 252	14,5
Coating grammage		g/m ²	ASTM D1505	2,5
Yield (nominal)		m ² /kg	ASTM E 252	52
		g/m ²	ASTM E 252	19,2
Tensile strength	MD	N/mm ²	ASTM D 882	220
		kg/inch		6,8
	TD	N/mm ²		250
		kg/inch		7,4
Elongation at Break	MD	%	ASTM D 882	130
	TD			110
Thermal Shrinkage 150°C -30'	MD	%	ASTM 1204	1,3
	TD			0,8
Haze		%	ASTM D1003	5
MVTR (38°C, 90%RH)		g/m ² *day	ASTM E398	6
OTR (20°C, 0%RH)		cc/m ² *day	ASTM D3985	6
CO ₂ TR (20°C, 0%RH)		cc/m ² *day	Internal method	50
N ₂ TR (20°C, 0%RH)		cc/m ² *day	Internal method	2,5
Welding force (Coating/Coating)		N/15 mm	130°C-1"- 1atm	1,1

1. This information is the best currently available on product and it is subject to revision as additional knowledge and experience is gained.
2. The results obtained and the above properties refer to average value of laboratory tests. Therefore, such results have only to be considered as an indicative general guide to material properties and not as an implied guarantee that the product actually has said properties and/or a warranty of fitness for a particular purposes and/or suggestion for infringement of any existing patents.
3. Due to many factors which may affect customer production process, including but not limited by different equipments and techniques used, PSA film must be qualified before being used in any application.