

# Peelable-C

## PPHC / PHAC

Data Sheet (January 2018)

### Product family Introduction

Nuroll Peelable-C is a bi-axially oriented polyester film, one side with an amorphous polyester heat seal layer, one side chemically treated to improve inks and/or adhesives adhesion. It is specially designed for heat sealable lidding application on packaging refrigerated and frozen foods.



Nuroll Peelable-C film shows also an excellent hot-tack for hot filling process. It can be placed at temperature down to  $-60\text{ }^{\circ}\text{C}$  and up to  $200\text{ }^{\circ}\text{C}$ , and it is designed for self opening during cooking, when temperature goes over  $90\text{ }^{\circ}\text{C}$ .

Nuroll Peelable-C film is dual ovenable, pasteurizable and provides strong, consistent peeling to substrates such as APET, CPET, PETG and PVC in all the usual conditions.

The heat seal layer is available in 2 different thicknesses,  $2\mu\text{m}$  (**PPLC** grade) and  $3,5\mu\text{m}$  (**PPHC** grade). Nuroll Peelable-C is commercially available also with **anti-fogging** characteristics to assure more clarity and transparency when stored in refrigerators.

### Sealing properties

Nuroll Peelable-C film shows a very good seal immediately after the sealing (hot tack properties), for this reason it represents the right choice for hot filling and MAP packaging applications. Its particular formulation guarantees a good seal without stress the shredding behavior.

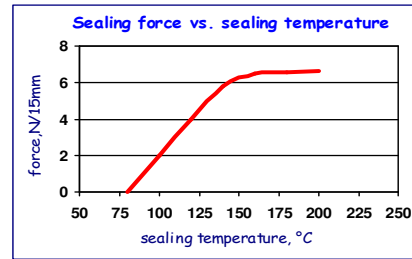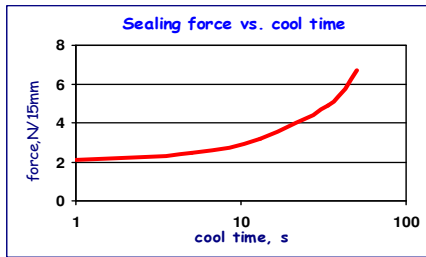

### Welding force of 23 PPHC on different substrates

Welding conditions	Film/Film	Film/Film at 0°C	Film/ CPET (APET layer)	Film/ Cardboard	Film/ Cardboard at 0°C	Film/ 23μ Film plain
140°C-4bar-1sec	> 6,5	5	5,5	2,5	2,5	2,5
140°C-4bar-2sec	> 6,5	5,5	6,5	3,5	2,5	2,5
140°C-4bar-4sec	> 6,5	5,5	7,5	3,5	2,5	2,5
160°C-4bar-1sec	> 7	6,5	7	3	3	3
160°C-4bar-2sec	> 7	6,5	7,5	3	3	3
160°C-4bar-4sec	> 7	6,5	7,5	4	3	3
190°C-4bar-1sec	> 7	> 7	7	3,5	3,5	4
190°C-4bar-2sec	> 7	> 7	8	4	3,5	4
190°C-4bar-4sec	> 7	> 7	8	4	3,5	4

Specimen structure	N/15 mm
Film/Film	> 6,5
Film/ 50μ Film plain	5
Film/ Cardboard	3,5
Film/ APET	7,5
Film/ 100% CPET	5

FORCE is measured by INSTRON dynamometer in N Sample dimension is 15 mm width

Cardboard is laminated with BOPET film, cardboard polyester extrusion coated behavior is like CPET


# Peelable-C

## PPHC / PHAC

### Product description

**Nuroll PPHC** is suggested when besides strong sealability (due to tray complex design or filling process that can dirty the sealing area by powder, fats or liquids) it is requested enhanced printability or laminate adhesion.

**Nuroll PPHC** is commercially available also with anti-fogging characteristics (**PHAC**) to assure more clarity and transparency when stored in refrigerators

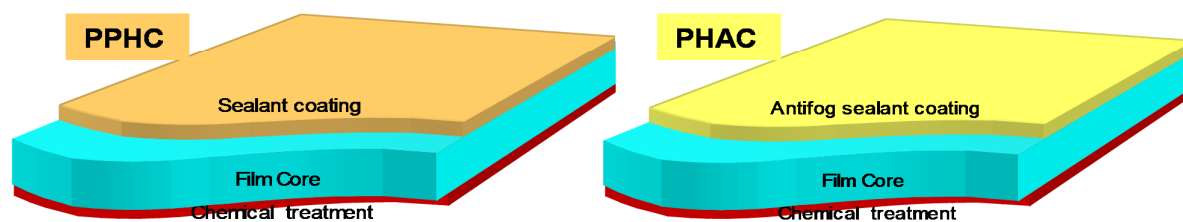

### Main Applications

Food containing fats, liquids, powder; food packaging for pasteurization; food packaging for hot fill process; food packaging for MAP process

### Technical details

Nuroll PPHC is usually supplied with following characteristics:

- ✦ **Core diameter:** 6 inches (152.76 mm)
- ✦ **Film width:** min 400 mm, max 1400mm
- ✦ **Film length:** According with film thickness and max external reel diameter 640mm

Film Thickness (microns)	23
Standard reel lenght (m)	8000

- ✦ **Packing presentation** suspended reel; wooden endboards, lid and pallet; stretchable PE film

### Different characteristics than the above on request

#### Storage conditions

Nuroll PPHC need to be stocked in a close warehouse and preserved from the light and from the humidity.

Reels must be not stacked

Nuroll will not accept any responsibility for material older than 1 year from the delivering

#### Compliance with regulations

**Polyester Film produced by Nuroll SpA, complies with EEC, Italian and FDA requirements on packaging for direct contact with foodstuffs**

## Peelable-C

### PPHC / PHAC

Properties	Unit	Test Method	Typical values PPHC grade	Typical values PHAC grade
Base film thickness	Microns	ASTM E 252	23	23
Coating thickness	Microns	ASTM E 252	3,5	3,5
Total thickness	Microns	ASTM E 252	26,5	26,5
Yield (nominal)	m <sup>2</sup> /kg	ASTM E 252	28	28
	g/m <sup>2</sup>		35,7	35,7
Tensile strength	MD	ASTM D 882	230	230
	TD		13,5	13,5
	MD		240	240
	TD		14,3	14,3
Elongation at Break	MD	ASTM D 882	130	130
	TD		120	120
Thermal Shrinkage 150 °C-30'	MD	ASTM 1204	2	2
	TD		0,5	0,5
Haze	%	ASTM D1003	8	8
MVTR (38 °C, 90%RH)	g/m <sup>2</sup> *day	ASTM E398	25	25
OTR (20 °C, 0%RH)	cc/m <sup>2</sup> *day	ASTM D3985	50	50
Welding force (on itself) 140 °C; 4 bar; 4 s	N/15mm	Internal	breaking	6,5

**⇒For thicknesses different than those reported above it is necessary to agree a minimum order and to full chart the mother roll width**

1. This information is the best currently available on product and it is subject to revision as additional knowledge and experience is gained.
2. The results obtained and the above properties refer to average value of laboratory tests. Therefore, such results have only to be considered as an indicative general guide to material properties and not as an implied guarantee that the product actually has said properties and/or a warranty of fitness for a particular purposes and/or suggestion for infringement of any existing patents.
3. Due to many factors which may affect customer production process, including but not limited by different equipments and techniques used, PPHC-PHAC film must be qualified before being used in any application.